


Fästkonor för borrhuckar

(anslutningsmått) enligt svensk standard SS 710 och DIN 238

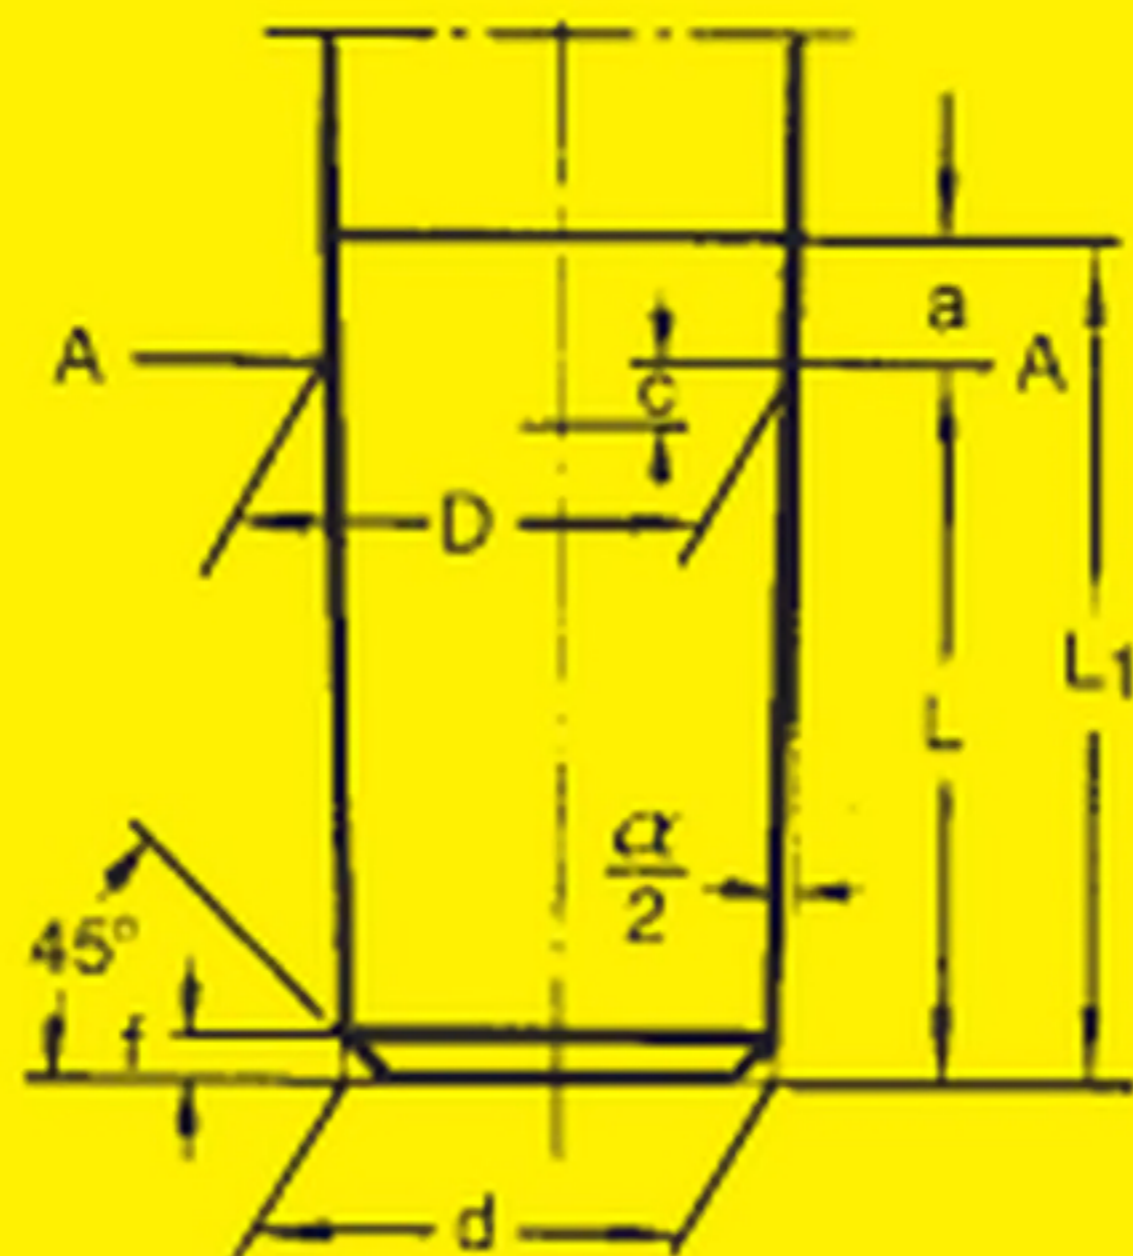

Konans beteckning	D	d	L	L ₁	a min.	f	c ¹⁾	Konicitet	α — 2	Borrhuckens maximala spänn diam. 2)
B 6	6,350	5,850	10	13	3	0,5	1	1:20	1°25'56"	3
B 10	10,095	9,371	14,5	18	3,5	1	1,5	1:20,047 (Morsekona 1)	1°25'43"	6
B 12	12,065	11,142	18,5	22	3,5	1	1,5			10
B 16	15,732	14,533	24	28	4	1,5	1,5	1:20,020 (Morsekona 2)	1°25'51"	13
B 18	17,780	16,182	32	36	4	1,5	1,5			16
B 22	21,792	19,759	40,5	45	4,5	2	2	1:19,922 (Morsekona 3)	1°26'16"	20
B 24	23,825	21,290	50,5	55	4,5	2	2			25