
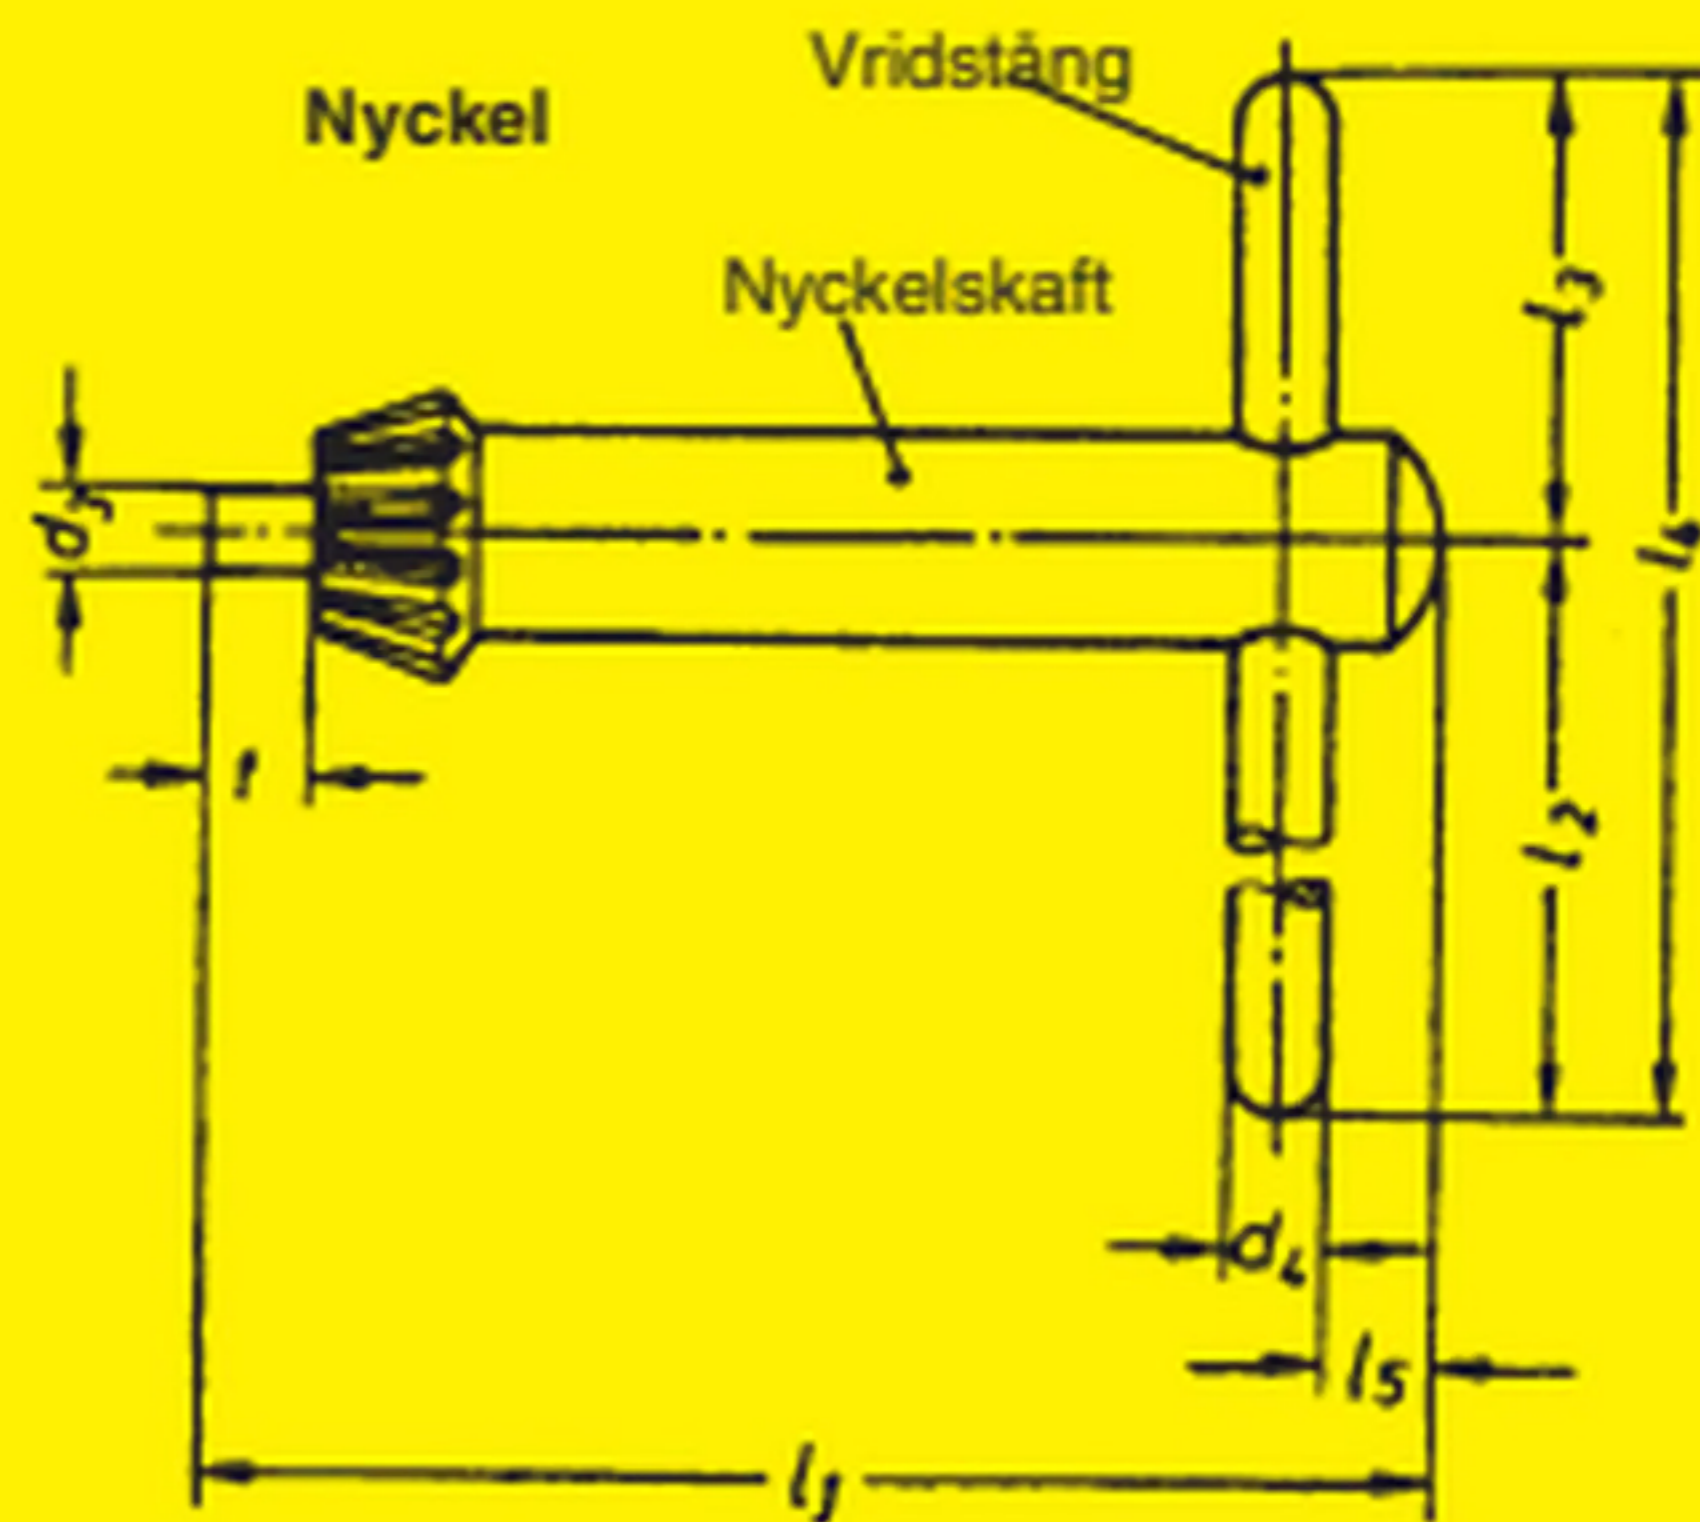


Kuggkrans och nyckel enligt DIN 6349/4 för trebackiga borrhuckar

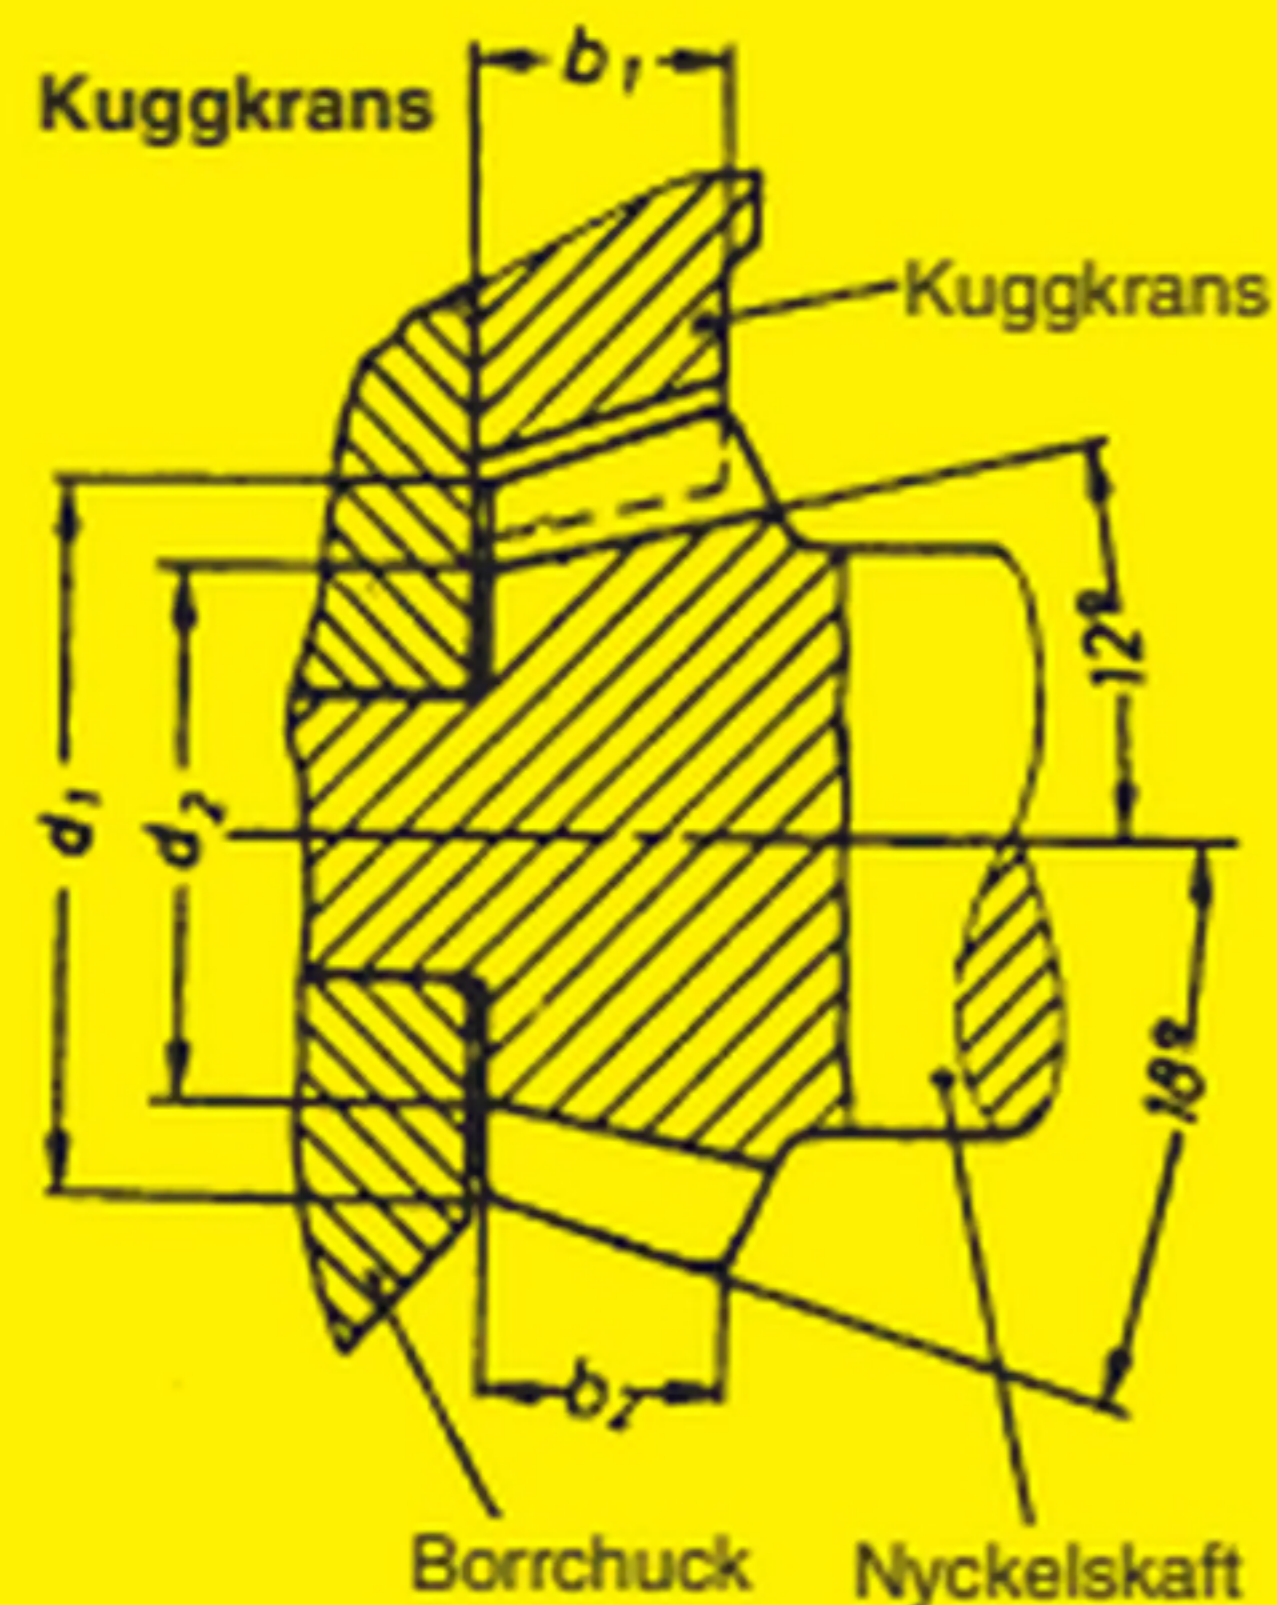

Storlek	Tandantal (kuggar) på nyckeln	För 3-backig borrhuck storlek			b_1 min.	b_2 min.	d_2 ± 0.2	d_3 d10	d_4 0 -0.2	l_1 min.	l_4 min.	l_5 0 -1	Modul m	t 0 -0.5
S 1	10	4 P	-	-	2,8	4	9,1	4	4	45	60	3	0,75	4,5
		6 P	6 M	8 L	3,3									
S 2	12	8 P	10 M	10 L	3,5	5	14	6	6	55 ¹	80	4	1	6,6
		10 P	13 M	13 L	4,5									
S 3	12	13 P	16 M	-	5,3	6	17,7	8	6	65	90	4	1,25	8
		16 P												
S 4	14	20 P	-	-	6,3	8	20,2	9	7	75	110	6	1,25	10
		26 P			7,5									